

charge4way




AKCOME

AK iChaser
PERC Module

540-560W

SK9612MDGDC

MONO 10BB Half-Cut Bifacial Dual-Glass Module

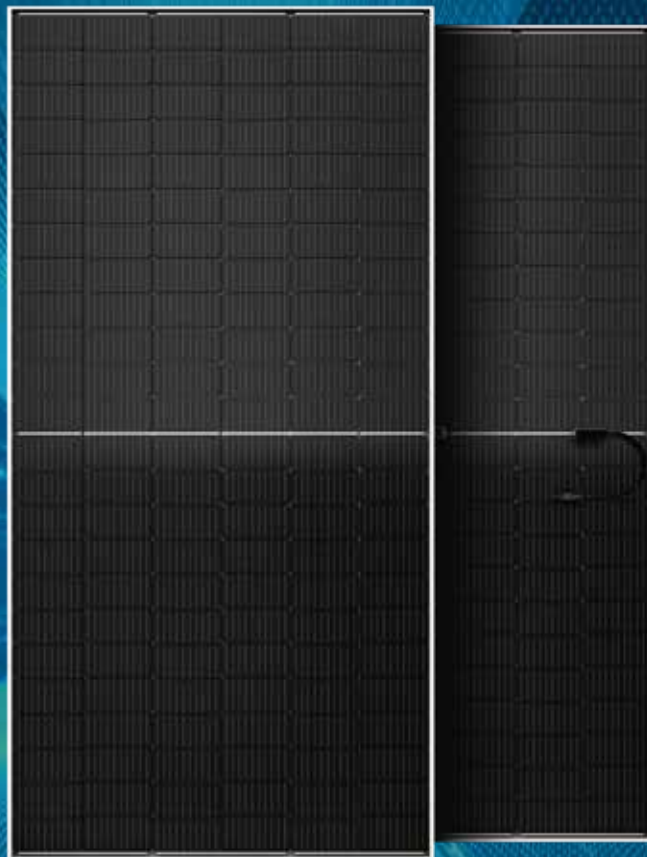

Fire class A, harsh environment adaptability

The back of the dual-glass module adopts high transparent glass, which can adapt to all kinds of harsh environment, and the fire rating can reach Class A.



30-year power warranty

The average life of dual-glass modules is 30 years, 5 years longer than that of single-glass modules.



Double-sided power generation, higher income

The dual-glass module has a double-sided ratio of up to 70% and a power generation gain of 5%-20% on the back side.



1500V system voltage

Due to the higher system voltage, the number of modules per string can be increased by 1/3, reducing the overall construction cost of the power station.


LINEAR PERFORMANCE WARRANTY

12
years

Product warranty on materials and workmanship

30
years

Linear power output warranty

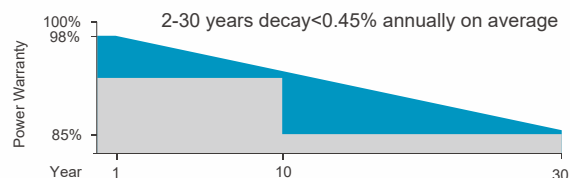

CERTIFICATES

ISO 9001: 2015
Quality Management System

IEC 61215 / IEC 61730

ISO 14001: 2015
Environmental Management System

OHSAS 18001: 2007
Occupational Health &
Safety Management System

*Certification requirements vary in different markets, please consult with Akcome Optronics sales team for appropriate certification.



540-560W

MONO 10BB Half-Cut Bifacial
Dual-Glass Module



ELECTRICAL PARAMETERS @ STC

Max. Power Output Pmax (W)	540	545	550	555	560
Power Tolerance	0~+3%	0~+3%	0~+3%	0~+3%	0~+3%
Max. Power Voltage Vmp (V)	41.93	42.03	42.12	42.21	42.30
Max. Power Current Imp (A)	12.88	12.97	13.06	13.15	13.24
Open Circuit Voltage Voc (V)	49.60	49.70	49.80	49.90	50.00
Short Circuit Current Isc (A)	13.73	13.82	13.91	14.00	14.09
Module Efficiency (%)	20.91	21.10	21.29	21.49	21.68

*STC (Standard Test Condition): Irradiance 1000W/m² , Cell Temperature 25°C, Air Mass 1.5

*Measurement Tolerance (±3.0%)

Inegrated Power @ STC

Power Gains	5%	10%	15%	20%	25%
Max. Power Output Pmax (W)	568	595	621	648	675
Max. Power Voltage Vmp (V)	42.03	42.03	41.93	41.93	41.93
Max. Power Current Imp (A)	13.52	14.17	14.81	15.46	16.10
Open Circuit Voltage Voc (V)	49.60	49.60	49.70	49.70	49.70
Short Circuit Current Isc (A)	14.42	15.10	15.79	16.48	17.16

TEMPERATURE COEFFICIENTS

Temperature Coefficients of Pmp	-0.35%/ °C
Temperature Coefficients of Voc	-0.29%/ °C
Temperature Coefficients of Isc	+0.048%/ °C

MECHANICAL PARAMETERS

Cell Type	Mono 182x91mm
Number of Cells	144pcs(6x24)
Dimensions (L*W*H)	2278x1134x30mm
Weight	32.5 kg
Frame	Anodised Aluminum
Junction Box	IP68, 3 bypass diodes
Cable, Length	4.0mm ² , 300mm

OPERATING CONDITION


Maximum System Voltage(V)	1500(DC)
Operating Temperature(°C)	-40~+85
Max. Wind Load / Snow Load(Pa)	2400/5400
Max. Series Fuse Rating(A)	30
Fire Rating	Class A
Bifaciality	70±5%

PACKAGE INFORMATION

Container 40'HQ	700pcs
Quantity / Pallet	35pcs
Package size: 2334 × 1124 × 1249mm; Net weight: 1137.5kg; Gross weight: 1198.5kg	


Ver: 202200909

ASSEMBLY DRAWING (Unit:mm)

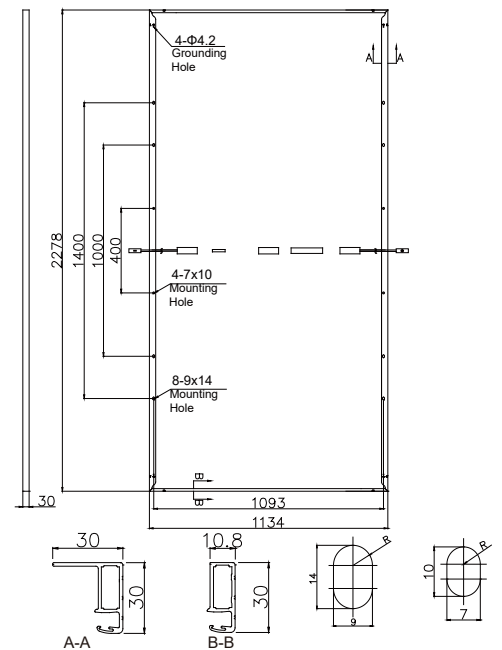

I-V CURVES

Test temperature 25°C

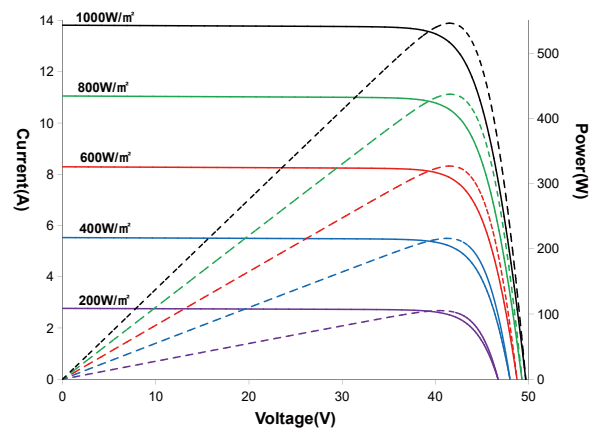

Irradiance: AM1.5, 1000W/m²

